



More information on the website
radwag.com/en/info,w1,7ZM

WTC 600 Precision Balance



Functions



Plus/Minus Control



Percent Weighing



Parts counting



Peak hold



GLP Procedures



ALIBI Memory

Datasheet

Metrological parameters	
Maximum capacity [Max]	600 g
Minimum load	0,5 g
Readability [d]	0,01 g
Tare range	-600 g
Repeatability	0,01 g
Linearity	±0,02 g
Stabilization time	2 s
Physical parameters	
Display	LCD (backlit)

Physical parameters	
Weighing pan dimensions	128×128 mm
Packaging dimensions	330×230×140 mm
Net weight	1,3 kg
Gross weight	2 kg
Protection class	IP 43
Communication interface	
Communication interface	RS232, USB-A, USB-B, Wi-Fi (option)
Electrical parameters	
Power supply	100 ÷ 240 V AC 50 / 60 Hz and battery
Power consumption max.	6 W
Operation time on batteries	15 h (average time)
Environmental conditions	
Operating temperature	+15 ÷ +30 °C

* Wi-Fi® is a registered trademark of Wi-Fi® Alliance.



Accessories

Receipt Printer
Cigarette lighter receptacle power supply cables



RS 232, RS 485 cables
RS 232 cables (scale - EPSON printer)

Software

RAD-KEY
LabVIEW Driver
R-LAB

RW Tool
R Panel
Scales Editor 2.0

Device dimensions

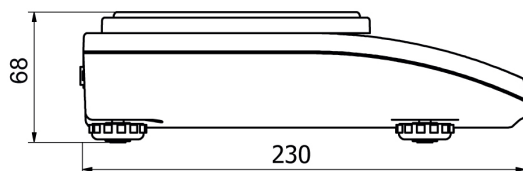

WTC: $d = 0.01 \text{ g}$, $d = 0.1 \text{ g}$